
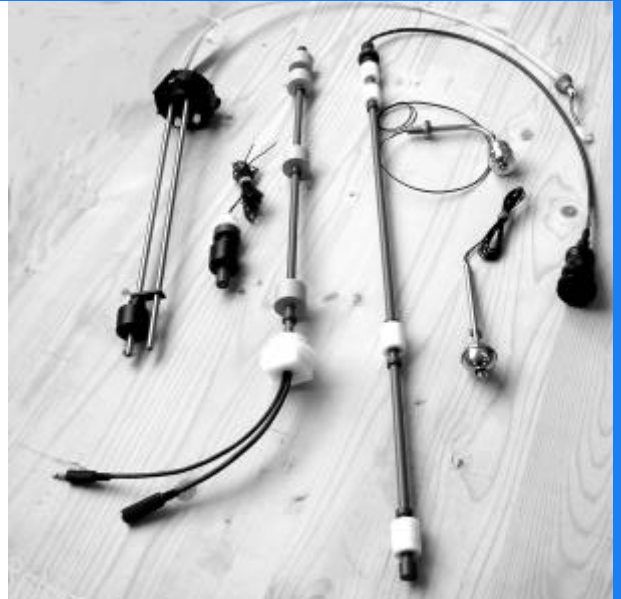


Custom Liquid Level Sensors

D
E
E
T
E
R

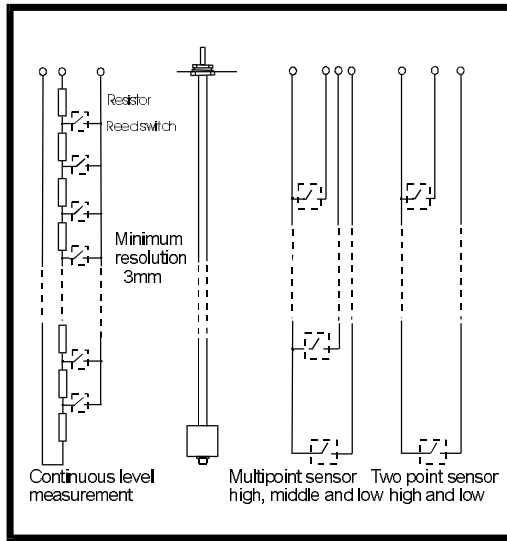


Model	Stem material	Fittings	Switch contact ratings (Resistive load)
LVCS Series	PVC, ABS & Stainless Steel	All std. sizes flanged and hex	0.25W - 70W *

** Higher capacities can be accommodated
Above 70W the tube diameter is larger, contact the sales office for details
For Chemical resistance data see our website*

FLOAT DATA **	Nylon	Polypropylene	Stainless Steel
Suitable specific gravity	0.7	0.6	0.8
Maximum Pressure	400 KPa	400 KPa	consult sales office
Operating Temperature ¹	0° - 80° C	0° - 100° C	0° - 200° C
Dimensions A	26.98mm	26.98mm	30.15mm
Dimensions B	25.4mm	25.4mm	26.98mm

****Other float materials available; PVC, Buna N etc.**

**¹ Lower temperature ranges are available
8mm dia. stem only**

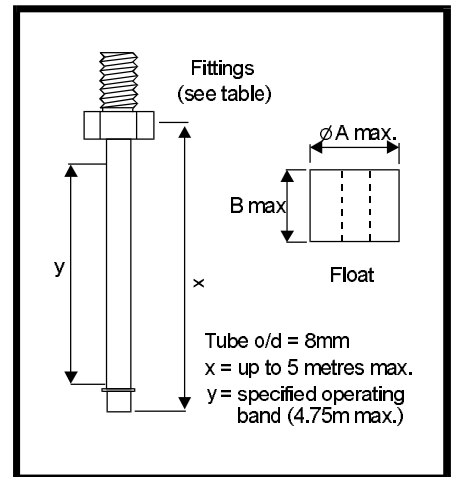

Deeter Electronics Ltd follows a policy of continual development of its products and reserves the right to change specifications and/or features without notice.

Deeter Electronics Ltd

Deeter House, Valley Road, Hughenden Valley, Bucks. HP14 4LW
Tel: 44(0)1494 566046 Fax: 44(0)1494 563961
Email: sales@deeter.co.uk Website: www.deeter.co.uk

Distributed by: